

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

DTIC FILE COPY

SOUTHERN METHODIST UNIVERSITY

(3)


A NOTE ON OPTIMAL AND ROBUST SPACING SELECTION

by

R. L. Eubank


Technial Report No. SMU/DS/TR-176
Department of Statistics CNR Contract

June, 1983

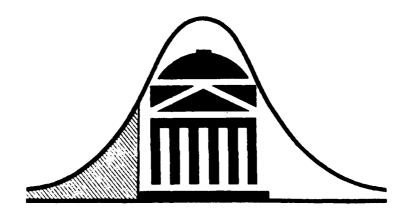

DEPARTMENT OF STATISTICS

DALLAS, TEXAS 75275



for public retents and a distribution is und

88 08 40 000

A NOTE ON OPTIMAL AND ROBUST SPACING SELECTION

by

R. L. Eubank

Technial Report No. SMU/DS/TR-176
Department of Statistics ONR Contract


June, 1983

Research sponsored by the Office of Naval Research Contract N0^014-82-k-0207

Reproduction in whole or in part is permitted for any purpose of the United States Government

The document has been approved for public release and sale; its distribution is unlimited

DEPARTMENT OF STATISTICS
Southern Methodist University
Dallas, Texas 75275



A NOTE ON OPTIMAL AND ROBUST SPACING SELECTION

R. L. Eubank

Department of Statistics Southern Methodist University Dallas, Texas 75275

Key Words and Phrases: optimal spacings, robust spacings, location and scale parameters.


ABSTRACT

The problem of quantile selection for the asymptotically best linear unbiased estimators of location and scale parameters is considered. The asymptotic properties of several quantile selection methods for simultaneous parameter estimation are derived and simple approximate solutions are provided. A robust scheme for quantile selection is also developed.

1. INTRODUCTION

Assume that a random sample, X_1, \dots, X_n , has been obtained from a distribution of the form $F(x) = F_0(\frac{x-u}{\sigma})$, where F_0 is a known distributional form and μ and σ are, respectively, location and scale parameters. This note is concerned with the estimation of μ and σ by the asymptotically best linear unbiased estimators (ABLUE's) based on k < n sample quantiles.



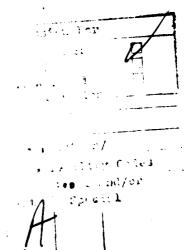

Define the sample quantile function by

$$Q(u) = X_{(j)}, \frac{j-1}{n} < u \le \frac{j}{n}, \quad j = 1, ..., n,$$
 (1.1)

where $X_{(j)}$ is the jth sample order statistic; then, given a spacing $T = \{u_1, \ldots, u_k\}$ (k real numbers satisfying $0 < u_1 < \ldots < u_k < 1$) the ABLUE's are easily computed linear functions of the $Q(u_i)$, $i = 1, \ldots, k$. Explicit estimator formulae as well as expressions for the asymptotic efficiency of the ABLUE's relative to the Cramér-Rao lower variance bounds can be found, for example, in Chapter 5 of Sarhan and Greenberg(1962), in Cheng(1975) or Eubank (1981a). Consequently, they will not be repeated here. As these formulae all involve the spacing, T, the problem we address is the selection of spacings that have optimal properties for certain functions of the estimators' asymptotic relative efficiencies (ARE's).

Before proceeding further it should be noted that spacing selection for the ABLUE is related to several other problems including those which derive from i) regression design for time series with Brownian bridge error processes, ii) variable breakpoint L²[0,1] piecewise constant approximation, iii) grouping selection for the asymptotically most powerful group rank test for two sample location and scale problems and iv) problems of optimal stratification and grouping (see Gastwirth (1966), Adatia and Chan(1981) and Eubank(1982) for discussions of some of the relationships between these problems). Consequently, the results presented here have applications in these areas as well. Of particular importance for this article is the connection between spacing selection and problems i) and ii) which is used, implicitly, in subsequent sections. For more detailed discussions of this relationship and further background material on the ABLUE see Eubank(1981a,b) and Eubank, Smith and Smith(1981).

Let $\mathbf{D}_{\mathbf{k}}$ represent the set of all k-element spacings and,

for TeD_{k} , denote the ABLUE's and their corresponding variance-covariance matrix by $(\mu(T), \sigma(T))^{\frac{1}{n}}$ and $\frac{\sigma^{2}}{n} A(T)^{-1}$, respectively. The joint ARE of the ABLUE's is then given by

$$ARE(\mu(T), \sigma(T)) = |A(T)|/|A| \qquad (1.2)$$

where A is the usual intrinsic accuracy matrix. The construction of spacings which maximize (1.2) is both mathematically and numerically intractable for most distributions. This has lead to consideration of other optimality criteria. For example, Hassanien (1969a, 1969b) and Eisenberger and Posner (1965) choose spacings that minimize the sum of the (asymptotic) estimators' variances which is equivalent to minimizing the trace of A(T) -, denoted tr A(T) -1. Another alternative, proposed by Hassanein (1977) is maximization of the sum of the estimators' ARE's or, equivalently, maximizing trA(T)B-1 where B is a diagonal matrix consisting of the diagonal elements of A. In Section 2 the asymptotic (as k→∞) properties of these alternative spacing selection schemes are derived and simple approximate solutions are provided. In each case, the solution is in the form of a density function, h, on [0,1]. The sequence of spacings $\{T_k\}$, $T_k \in D_k$, whose kth element consists of the (k+l)-tiles of h is called the regular sequence generated by h, denoted RS(h), and for k sufficiently large and optimal $h_{\star} \cdot T_{\nu}$ is the proposed approximate solution.

In Section 3 robust spacing selection is considered. The problem, in this case, is to select a (spacing) density that is optimal relative to a known finite set of probability laws. The resulting solution provides an asymptotic analog of a procedure suggested by Chan and Rhodin(1980).

2. ASYMPTOTICALLY OPTIMAL SPACINGS

Denote the quantile function corresponding to F_0 by Q_0 .

Assume that F_0 admits a density, f_0 , and, hence, a density-quantile function $d_0(u) = f_0(Q_0(u))$, $0 \le u \le 1$. Throughout this section we require that both d_0 and the product $d_0 \cdot Q_0$ be twice continuously differentiable on [0,1] and vanish at the ends of the interval. We also adopt the notation

$$\psi(\mathbf{u}) = (\mathbf{d}_0^{"}(\mathbf{u}), (\mathbf{d}_0 \cdot \mathbf{Q}_0)^{"}(\mathbf{u}))^{\mathsf{t}}. \tag{2.1}$$

Using n to denote any one of the criteria considered in Section 1, i.e., |A(T)|, $trA(T)^{-1}$ or $trA(T)B^{-1}$, we now define and illustrate our concepts of asymptotic optimality for spacing sequences. A more detailed development of these topics and other results in this section can be found in Eubank(1981b). A sequence of spacings $\{T_k\}$ is called asymptotically n1-optimal if

$$\lim_{k\to\infty} [\eta(A) - \sup_{x \to \infty} \eta(A(T))] [\eta(A) - \eta(A(T_k))]^{-1} = 1$$
 (2.2)

and asymptotically n2-optimal if

$$\lim_{k \to \infty} [\inf_{T \in D_k} \eta(A(T)^{-1}) - \eta(A^{-1})] [\eta(A(T_k)^{-1}) - \eta(A^{-1})]^{-1} = 1.$$
 (2.3)

In the case of the determinant criterion it was shown in Eubank (1981a) that a sequence of optimal spacings for (1.2) satisfies $\lim_{k\to\infty} k^2 [|A| - \sup_{T\in D_k} |A(T)|] = \frac{1}{12} (\int_0^1 [\psi(u)^{t} A^{-1} \psi(u)]^{1/3} du)^3 \equiv \lambda_D^3 / 12 \quad (2.4)$

and that the RS generated by $h_D(u) = [\psi(u)^{\dagger}A^{-1}\psi(u)]^{1/3}/\lambda_D$ is asymptotically n1-optimal. Thus (2.2) has the interpretation that, for $\{T_k^*\}$ RS(h_D), $|A| - |A(T_k^*)|$ converges at the same rate (namely $O(k^{-2})$) with the same asymptotic constant $(\lambda_D^3/12)$ as $|A| - \sup_{T \in D_k} |A(T)|$. Similar interpretations hold for the other cases that are considered.

If η is now taken as the sum of ARE's it follows by arguments similar to those in Eubank(1981a) and Theorem 4.1 of Sacks and Ylvisaker(1968) that a sequence of spacings obtained by maximizing $\text{trA}(T)B^{-1}$ satisfies

$$\lim_{k\to\infty} k^{2} [\operatorname{tr}AB^{-1} - \sup_{\mathbf{T} \in D_{k}} \operatorname{tr}A(\mathbf{T})B^{-1}]$$

$$= \frac{1}{12} \{ \int_{0}^{1} [\psi(\mathbf{u})^{\dagger}B^{-1}\psi(\mathbf{u})]^{1/3} d\mathbf{u} \}^{3} \equiv \lambda_{S}^{3/12}.$$
(2.5)

An approximate (asymptotic) solution is provided by the RS obtained from $h_S(u) = [\psi(u)^{\dagger}B^{-1}\psi(u)]^{1/3}/\lambda_S$ which is asymptotically nl-optimal. For spacings chosen to minimize the sum of the estimators variances we have (see Theorem 4.5 of Sacks and Ylvisaker(1968) and the subsequent remark)

$$\lim_{k \to \infty} k^{2} [\inf_{T \in D_{k}} tr A(T)^{-1} - tr A^{-1}]$$

$$= \frac{1}{12} \{ \int_{0}^{1} [\psi(u)^{t} A^{-2} \psi(u)]^{1/3} du \}^{3} \equiv \lambda_{V}^{3} / 12.$$
(2.6)

An asymptotically η 2-optimal sequence for this criterion is provided by the RS generated by $h_{ij}(u) = [\psi(u)^{\dagger}A^{-2}\psi(u)]^{1/3}/\lambda_{ij}$.

The diagonal nature of B has the consequence that h_S will be easier to use, in general, than h_D or h_V for spacing computation. Moreover, we see from (2.4) and (2.5) that maximizing |A(T)| and $trA(T)B^{-1}$ are asymptotically equivalent procedures for symmetric distributions as, in this case, B = A (this explains the similarity between these two solutions observed by Kulldorff(1963) for the normal distribution). The same cannot be said for spacings which minimize the sum of the variances.

The computation of asymptotically optimal spacings from h_D , h_S , and h_V will usually require the use of numerical methods (c.f. Eubank(1981a)). A distribution admitting a closed form solution is the Cauchy where asymptotically optimal spacings are provided by uniformly spaced points (i.e., $T_k = \{\frac{i}{k+1}; i = 1, \ldots, k\}$) in all three cases.

3. ROBUST SPACING SELECTION

In this section we relax the assumption that \mathbf{F}_0 is known

precisely and assume, instead, that F_0 is known only to belong to a given finite set of probability laws, L. The problem now is to select spacings that are robust relative to L.

Consider first the case of location parameter estimation. For L, Gel let $T(G) \in D_K$ denote the optimal spacing for G and let $ARE(\mu(T(G)) \mid L)$ be the ARE for T(G) when L is the true underlying distribution. Chan and Rhodin(1980) suggest choosing a spacing $T(G^*)$ that satisfies

min ARE(
$$\mu(T(G^*))$$
|L) = max min ARE($\mu(T(G))$ |L). (3.1)
LeL GeL LeL

This solution provides a candidate for F_0 , namely G^* , and μ is estimated accordingly. A spacing selected using (3.1) is an element of $\{T(G);G\epsilon L\}$ which maximizes the guaranteed asymptotic relative efficiency (GARE), min ARE($\mu(T(G)) \mid L$), and is robust in Gel this sense of providing maximum GARE over the optimal spacings for laws in L. A disadvantage of this approach is that tedious computations must be performed for each value of k. We now present an asymptotic (as $k\rightarrow\infty$) alternative to (3.1) that alleviates this difficulty.

Let H denote a finite set of bounded piecewise continuous density functions on [0,1] where, for heH, the set of points where 1/h vanishes or is discontinuous is assumed to have content zero and neither 0, nor 1 as an accumulation point. Also assume that for each LeL the corresponding density-quantile function d_L is in $C^2(0,1)\cap L^2[0,1]$ and monotone near 0 and 1. It then follows from Pence and Smith(1981) that for any heH and LeL if $\{T_k\}$ is RS(h) then

$$\lim_{k\to\infty} k^2 a_{11}(L) \left[1-\text{ARE}(\mu(T_k)|L)\right] = \frac{1}{12} \int_0^1 \left[d_L^{**}(u)\right]^2 \left[h(u)\right]^{-2} du \qquad (3.2)$$

where $a_{11}^{}(L)$ is the element that corresponds to μ in the infor-

mation matrix for L, A_L say. Thus, what distinguishes between the performance of spacing sequences generated by the densities in H is, for fixed L, the asymptotic constant in (3.2). An element of H that is optimal relative to L is therefore provided by: Choose $h^* \in H$ to satisfy

$$\max_{L \in L} \int_{0}^{1} [d_{L}^{*}(u)]^{2} [h^{*}(u)]^{-2} du = \min_{h \in H} \max_{L \in L} \int_{0}^{1} [d_{L}^{*}(u)]^{2} [h(u)]^{-2} du. \quad (3.3)$$

One can then estimate μ using, for instance, the law at which $\int_0^1 \left[d_L^n(u)\right]^2 \left[h^*(u)\right]^{-2} du$ is minimized. Alternative conditions under which (3.3) is valid can be deduced from Theorem 4.4 of Pence and Smith(1981) and Theorem 3.1 of Sacks and Ylvisaker(1968).

A logical choice for H would seem to be the set of optimal densities for location parameter estimation corresponding to the various laws in L, $\{ |d_L^{"}(u)|^{2/3}/\int_0^1 |d_L^{"}(s)|^{2/3} ds \}$, LeL (see Eubank (1981a)). Choosing H in this manner we now compare spacings selected using (3.3) to those obtained by Chan and Rhodin(1980) using (3.1). As they restrict attention to laws that are (essentially) members of the Tukey lambda family we shall do likewise and, also for comparison purposes, take k = 5. Using $L(\lambda)$ to denote that member of the Tukey lambda family having shape parameter λ , a comparison of spacing GARE's for the two procedures is provided in Table 1 for a few selected choices of L. It is important to note that a spacing obtained using (3.1) is not a spacing that maximizes the GARE over all TeD_{k} (c.f. Chan and Rhodin(1980, p. 236)). Thus spacings obtained using the asymptotic approach may, in fact, result in larger GARE's as is illustrated by the case of $L = \{L(-.1), L(0), L(.1), L(.14)\}$ and $L = \{L(-.6), L(-.5), L(-.4), L(-.3)\}.$

TABLE 1. Comparison of Spacing GARE's

L	Optimal Spacings	Asymptotic Solution
{L(0),L(.1),L(.14)} {L(1),L(0),L(.1),L(.14)}	.9332 .9015	.9111 .9080
{L(6),L(5),L(4),L(3) {L(-2.0),L(-1.8),L(-1.6),	9568	.9581
L(-1.4),L(-1.2)}	.9207	.9056

Of course there is no reason to restrict attention to location parameter estimation. A scale parameter version of (3.3) is readily obtained by replacing d_L with the product $d_L \cdot Q_L$ in the previous discussion where Q_L is the quantile function for LeL. For the estimation of both μ and σ observe that if heH and $\{T_k\}$ is RS(h), then from the preceeding comment and (3.2)

$$\lim_{k\to\infty} k^2 \text{tr}[A_L - A_L (T_k)] B_L^{-1} = \frac{1}{12} \int_0^1 \{ \psi_L (u) \, ^t B_L^{-1} \psi_L (u) \} [h(u)]^{-2} du \quad (3.4)$$

where ψ , A(T) and B have now been subscripted to indicate their dependence on L. Thus one approach to simultaneous parameter estimation can be based on (3.4). In this case H might be chosen to consist of the optimal densities for $\text{trA}_L(T)B_L^{-1}$, Le L, given in Section 2. Analogs of (3.4) can also be obtained for the other criteria that have been considered.

REFERENCES

- Adatia, A. and Chan, L. K. (1981). Relations between stratified grouped and selected order statistics samples. <u>Scand</u>.

 <u>Actuarial</u> J., 193-202.
- Chan, L. K. and Rhodin, L. S. (1980). Robust estimation of location using optimality chosen sample quantiles. <u>Technometrics</u> 22, 225-237.
- Cheng, S. W. (1975). A unified approach to choosing optimum quantiles for the ABLE's. J. Amer. Statist. Assoc. 70, 155-159.
- Eisenberger, I. and Posner, E. C. (1965). Systematic statistics used for data compression in space telemetry. J. Amer. Statist. Assoc. 60, 97-133.
- Eubank, R. L. (1981a). A density-quantile function approach to optimal spacing selection. Ann Statist. 9, 494-500.
- Eubank, R. L. (1981b). A regression design approach to optimal and robust spacing selection. Tech. Rep. No. 144, Dept. of Statist., Southern Methodist University.
- Eubank, R. L. (1982). A quantile domain perspective on the relationships between optimal grouping, spacing and stratification problems. Statistics and Probability Letters 1, 69-73.
- Gastwirth, J. L. (1966). On robust procedures. <u>J. Amer. Statist.</u>
 Assoc. 61, 929-948.
- Hassanein, K. M. (1969a). Estimation of the parameters of the extreme value distribution by use of two or three order statistics. Biometrika 56, 429-436.
- Hassanein, K. M. (1969b). Estimation of the parameters of the logistic distribution by sample quantiles. Biometrika 56, 684-687.
- Hassanein, K. M. (1977). Simultaneous estimation of the location and scale parameter of the gamma distribution by linear functions of order statistics. Scandinavian Actuarial J., 88-93.

- Kulldorff, G. (1963). On the optimum spacing of sample quantiles from the normal distribution, Part I. Skand. Aktuarietidskr. 46, 143-156.
- Pence, D. D. and Smith, P. W. (1981). Asymptotic properties of best Lp[0,1] approximation by splines. SIAM J. Math. Anal. 13, 409-420.
- Sacks, J. and Ylvisaker, D. (1968). Designs for regression problems with correlated errors; many parameters. Ann. Math. Statist. 39, 40-69.
- Sarhan, A. E. and Greenberg, B. G. (eds.) (1962). Contributions to Order Statistics. New York: John Wiley.

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
REPORT NUMBER	2. GOVT ACCESSION NO	RECIPIENT'S CATALOG NUMBER
SMU/DS/TR-176	H130 40	
TITLE (and Subtitie)	· · · · · · · · · · · · · · · · · · ·	5. TYPE OF REPORT & PERIOD COVERED
A NOTE ON OPTIMAL AND ROBUST SPACING SELECTION		Technical Report
		6. PERFORMING ORG. REPORT NUMBER
		176
AUTHOR(a)		8. CONTRACT OR GRANT HUMBER(#)
ANDALL L. EUBANK		N00014-82-k-0207
PERFORMING ORGANIZATION NAME AND ADDR	ESS	10. PROGRAM ELEMENT PROJECT, TASK AREA & WORK UNIT NUMBERS
Southern Methodist University		
Dallas, Texas 75275		NR-042-479
CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE
ffice of Naval Research		June, 1983
Arlington, VA 22217		13. NUMBER OF PAGES
······································		10
MONITORING AGENCY NAME & ADDRESS(II dil	lerent from Controlling Office)	15. SECURITY CLASS. (at this report)
		150. DECLASSIFICATION/ DOWNGRADING SCHEDULE
		1
•		
6. DISTRIBUTION STATEMENT (of this Report) This document has been approdistribution is unlimited. Refor any putpose of The United 7. DISTRIBUTION STATEMENT (of the obstract ontition)	production in whole States Government.	e or in part is permitted
This document has been approdistribution is unlimited. Refor any putpose of The United 7. DISTRIBUTION STATEMENT (of the abstract and	production in whole States Government.	e or in part is permitted
This document has been approdistribution is unlimited. Refor any putpose of The United 7. DISTRIBUTION STATEMENT (of the abstract onto	eproduction in whole States Government.	e or in part is permitted
This document has been approdistribution is unlimited. Refor any putpose of The United 7. DISTRIBUTION STATEMENT (of the abstract onto	eproduction in whole States Government.	e or in part is permitted
This document has been approdistribution is unlimited. Refor any putpose of The United	eproduction in whole States Government. Fored in Block 20, if different from the Block 20, if different from the Block number, and identify by block number, lection for the asy and scale parameted and simple approximately and simple approximately.	e or in part is permitted on Report) (mptotically best linear ers is considered. The on methods for simultaneous ximate solutions are provi-

FILMED